

Rec'd PCT/PTO 03 JAN 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

10/519916

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
15 January 2004 (15.01.2004)

PCT

(10) International Publication Number  
WO 2004/005735 A1

(51) International Patent Classification<sup>7</sup>: F16D 3/26, 3/16

(21) International Application Number:  
PCT/GB2003/002835

(22) International Filing Date: 2 July 2003 (02.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0215549.7 4 July 2002 (04.07.2002) GB

(71) Applicant (for all designated States except US):  
BERNARD, Derek, John, Charles [GB/—]; c/o Trans-  
mission Systems Limited, Chalet Abaco, Green Road, St.  
Clement, Jersey JE2 6QA (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): CARDEN, John,

Craven [GB/BS]; c/o Transmission Systems Limited,  
Chalet Abaco, Green Road, St. Clement, Jersey JE2 6QA  
(GB).

(74) Agent: SHACKLETON, Nicola; Page White & Farrer, 54  
Doughty Street, London WC1N 2LS (GB).


(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,  
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,  
VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: CONSTANT VELOCITY JOINTS

(57) Abstract: The present invention relates to a constant velocity  
universal joint comprising two shafts (1, 2) each having a claw (3,  
4) located on one end. First and second hinge elements (5, 6)  
are rotatably mounted between the claws (3, 4). A cage (7, 8) is  
also provided which can reciprocate with respect to the hinge  
elements (5, 6) in the direction of the hinge axis (H).

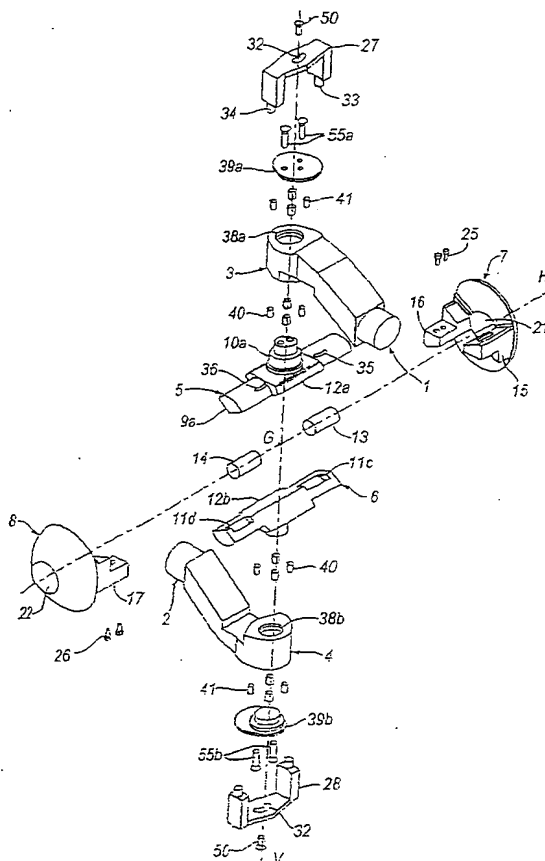

BEST AVAILABLE COPY

WO 2004/005735 A1